



ENDEAVOR OPERATIONS PTY LTD

# ENDEAVOR MINE

## MONTHLY ENVIRONMENTAL REPORT

---

September  
2019

<b>Name of Operation</b>	Endeavor Mine
<b>Name of Licensee</b>	Endeavor Operations Pty Ltd
<b>Environmental Protection Licence</b>	No: 1301
<b>Reporting Period Start Date</b>	1 September 2019
<b>Reporting End Date</b>	30 September 2019
<b>Author</b>	Fabio Perez
<b>Approver</b>	Carlos Vanegas

**TABLE OF CONTENTS**

1	INTRODUCTION.....	5
2	Meteorology.....	6
2.1	Air Temperature, Relative Humidity and Barometric Pressure .....	6
2.1.1	Air Temperature, Relative Humidity and Barometric Pressure: Data and Discussion .....	6
2.2	Wet Bulb Temperature .....	7
2.2.1	Wet Bulb Temperature: Data and Discussion.....	7
2.3	Black Globe Temperature .....	8
2.4	Thermal Work Limit.....	8
2.5	Rainfall.....	9
2.5.1	Rainfall: Data and Discussion .....	9
2.6	Wind .....	10
2.6.1	Wind Speed and Wind Gusts: Data and Discussion .....	11
2.6.2	Wind Direction: Data and Discussion.....	12
2.7	Solar Radiation.....	12
2.8	Rate of Evaporation.....	13
2.8.1	Rate of Evaporation: Data and Discussion .....	13
3	Monitoring Requirements.....	15
3.1	Dust Monitoring.....	15
3.1.1	Dust Monitoring Methodology and Limits .....	15
3.1.2	Monitoring Locations.....	16
3.2	Dust Monitoring Data and Discussion .....	17
3.3	Groundwater Monitoring.....	18
3.3.1	Monitoring Locations .....	18
3.3.2	Monitoring Results Discussion .....	20
4	Surface Water .....	22
4.1	Monitoring Methodology .....	22
4.2	Monitoring Locations.....	22
4.3	Surface Water: Data and Discussion.....	23
5	Raw Water Usage.....	23
5.1	Monitoring Methodology .....	24
5.2	Raw Water: Data and Discussion.....	24
6	Noise Management.....	24
6.1	Noise and Vibration Assessment .....	25

---

## Monthly Environmental Report

For Month Ending 30 September 2019

---

6.1.1	Neighbours (Sensitive Receptor) .....	25
6.1.2	Noise Management Plan .....	25
6.2	Monitoring Locations.....	26
6.3	Noise Monitoring: Data and Discussion.....	26
7	Waste Management.....	26
7.1	Waste Management: Data and Discussion .....	27
8	Tailings Deposition .....	27
8.1	Tailings Deposition: Data and Discussion.....	27
9	Tailings Dam Surveillance.....	28
9.1	Discussion .....	28
10	Waste Rock Management.....	28
11	Rehabilitation and Research .....	29
11.1	Discussion .....	29
12	Complaints Hotline.....	29

## FIGURES LIST

Figure 2.1	Monthly Temperature, Humidity and Barometric Pressure for September 2019 .....	6
Figure 2.2	Daily Maximum Air Temperature for September 2019.....	7
Figure 2.3	Daily Max, Min and Ave Wet Bulb Temperature Levels for September 2019 .....	7
Figure 2.4	Min, Max and Ave Black Globe Temperature for September 2019.....	8
Figure 2.6	Thermal Work Limit Working zones chart.....	8
Figure 2.7	Thermal Work Limits: Maximum and Minimum Levels for September 2019.....	9
Figure 2.8	Rain Gauge Total for September 2019.....	10
Figure 2.9	Wind rose example .....	11
Figure 2.10	Average Wind Speed, Maximum Wind Speed and Maximum Wind Gusts for September 2019.....	12
Figure 2.11	Wind Rose for the Endeavor Mine for September 2019.....	12
Figure 2.12	Daily Solar Radiation Levels (Ave and Max) September 2019 .....	13
Figure 2.13	Daily Evaporation Rates for September 2019. ....	14
Figure 3.1	Dust monitoring gauge located in the project .....	15

## Monthly Environmental Report

For Month Ending 30 September 2019

---

Figure 3.2	Endeavor Mine Dust Monitoring Locations .....	17
Figure 3.3	Location of the Piezometer Monitoring Locations.....	20
Figure 4.1	The Endeavor Mine: Main Water Storages.....	23
Figure 5.1	Endeavor Raw and Process Water flows .....	24
Figure 6.1	Closest Neighbours to Endeavor Mine.....	26

## TABLES LIST

Table 2.1	Rain Gauge Total for September 2019.....	9
Table 2.2	YTD Rainfall for Cobar, NSW (01/01/2019 to 30/09/2019).....	10
Table 2.3	Total Daily Evaporation Rates for September 2019 .....	13
Table 3.1	Endeavor Mine Air Monitoring Requirements .....	16
Table 3.2.	Dust monitoring results from July and August 2019.....	17
Table 3.3.	Dust monitoring results from September 2019.....	18
Table 3.4	EPA Monitoring Stations.....	18
Table 3.5	EPA Monitoring Stations.....	19
Table 3.6	Groundwater quarterly quality analysis (September 2019) .....	21
Table 5.1	Raw Water Use for September 2019 .....	24
Table 7.1	Requirements for the Storage and Handling of Waste under EP 1301 .....	27
Table 8.1	Tailings Deposition for September 2019.....	28

### 1 INTRODUCTION

We at Endeavor Mine conduct systematic and periodic environmental monitoring of our operations to substantiate the effectiveness of our environmental controls which are in place to protect the environment, the health of our workers, our neighbours and the greater community. **Welcome to the September 2019 Environmental** Monitoring Report. This report has also been produced to satisfy our reporting obligations under the Protection of the Environment Operations Act 1997 (POEO Act), Mine Operational Plan (MOP) and EP Licence 1301 which requires for Endeavor Mine to publish or make pollution monitoring data available to members of the public. The report provides a summary of monthly environmental monitoring results for August 2019. Endeavor Mine's environmental monitoring program includes the monitoring of contaminants to air, surface water and ground water at locations within or beyond mine site boundary. The program also involves the monitoring of noise (when required), the management of hazardous and non-hazardous waste, the deposition of tailings, stability of tailings structures, reporting of resources such as raw water usage and rehabilitation and post mining land use studies.

All monitoring is conducted in accordance with regulatory requirements and the EOPL Annual Environmental Monitoring Plan. Samples are collected and handled in accordance and compliance with regulatory requirements and taken to laboratories accredited by the National Association of Testing Authorities (NATA) for analysis. The Report also compares the results against established internal and external targets and provides critical discussion on environmental issues and sustainability initiatives during the monitoring period.

## 2 METEOROLOGY


The following section presents historical and current weather data for Cobar and the surrounding Shire. Endeavor has installed on site a high quality weather station to enable more accurate on site data to be downloaded and reported. The December 2018 Report was the first use of data collected from site. This includes a change in format on how we present the data.

### 2.1 Air Temperature, Relative Humidity and Barometric Pressure


Cobar has a semi-arid climate with hot summers and cool to mild winters. Winter nights can be quite cold. Average monthly maximum temperatures tend to range from 13 °C to 20 °C in winter to between 28 °C to 39 °C in summer. Average monthly minimum temperatures range from 2 °C to 8 °C in winter to 14°C to 24 °C in summer. The humidity in Cobar is low. During the summer the average relative humidity is about 30% in the afternoon and about 50% at 9am. In winter it is about 45% at 3pm, whilst it is about 75% at 9am.

#### 2.1.1 Air Temperature, Relative Humidity and Barometric Pressure: Data and Discussion

The average air temperature for the Endeavor Mine for September 2019 was 15.92 °C with a maximum temperature of 31.8 °C and a minimum air temperature of 0.2 °C. Figure 2.1 shows the data in a daily graphical representation of averages for Air Temperature, Relative Humidity and Barometric Pressure. Figure 2.2 shows the Daily Maximum Air Temperature for September 2019.

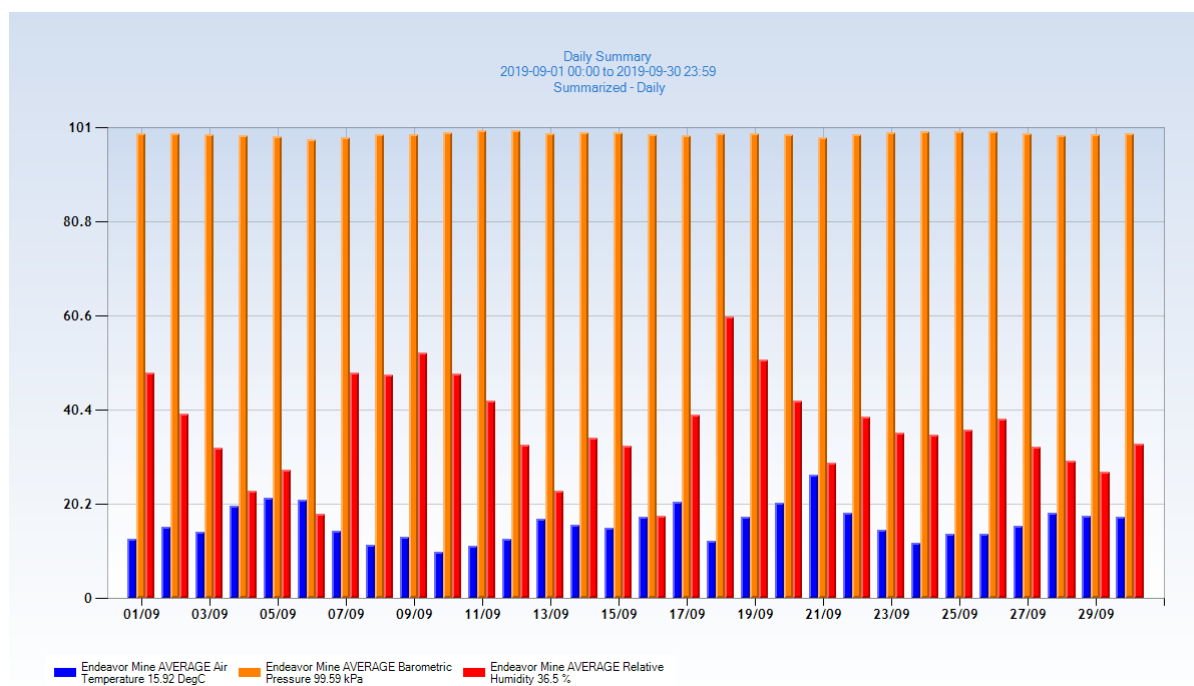

**Figure 2.1** Monthly Temperature, Humidity and Barometric Pressure for September 2019

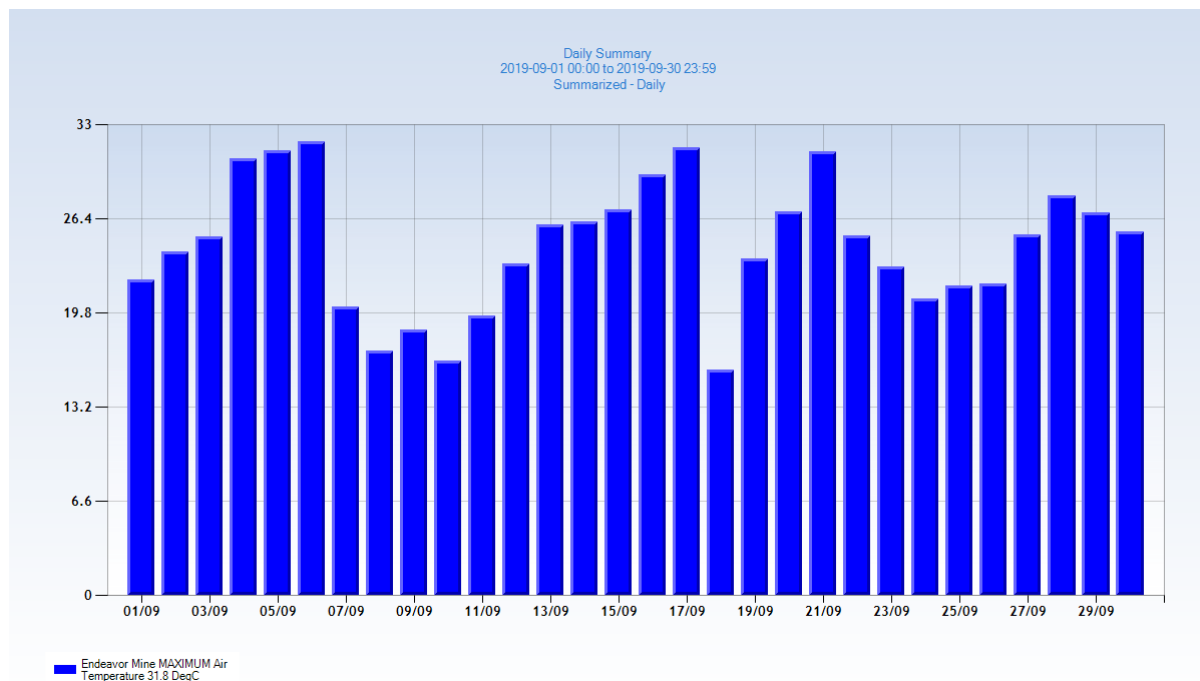


**Figure 2.2** Daily Maximum Air Temperature for September 2019

## 2.2 Wet Bulb Temperature

### 2.2.1 Wet Bulb Temperature: Data and Discussion

Figure 2.3 shows the Maximum, Minimum and Average Wet Bulb temperature. All maximum measurements remained well under the 27.7 °C threshold and show surface Wet Bulb work conditions to be safe during September 2019.

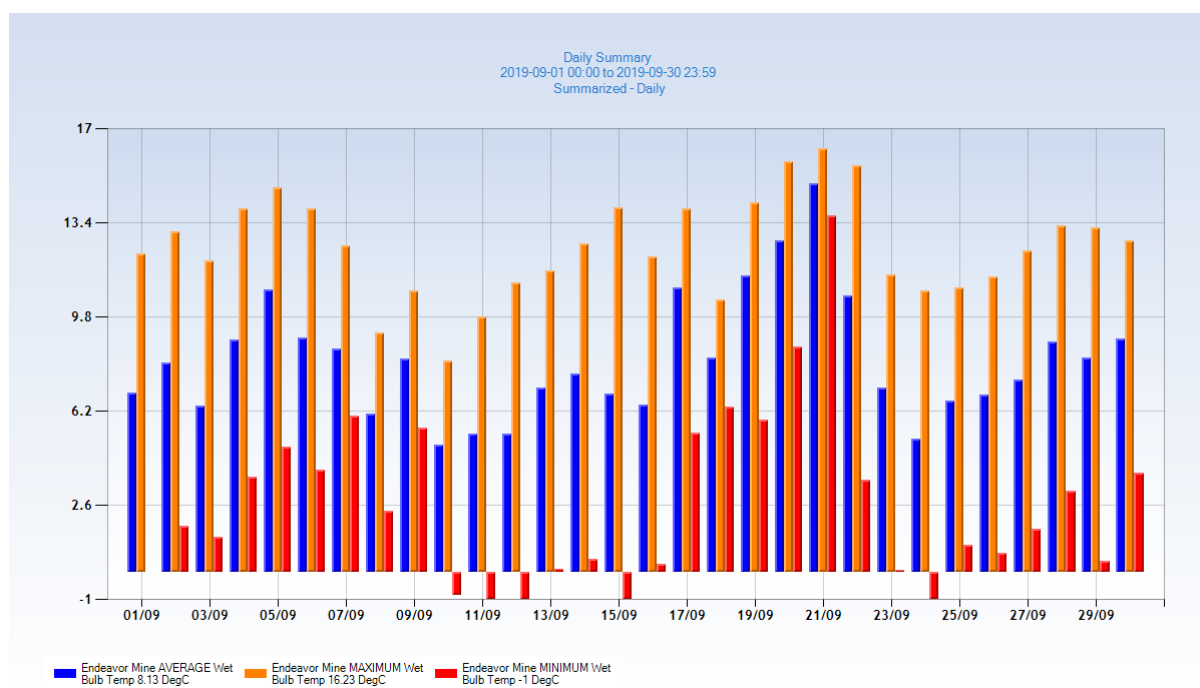

**Figure 2.3** Daily Max, Min and Ave Wet Bulb Temperature Levels for September 2019

## Monthly Environmental Report

For Month Ending 30 September 2019

### 2.3 Black Globe Temperature

Black Globe Temperature is used to calculate Thermal Work Limits.

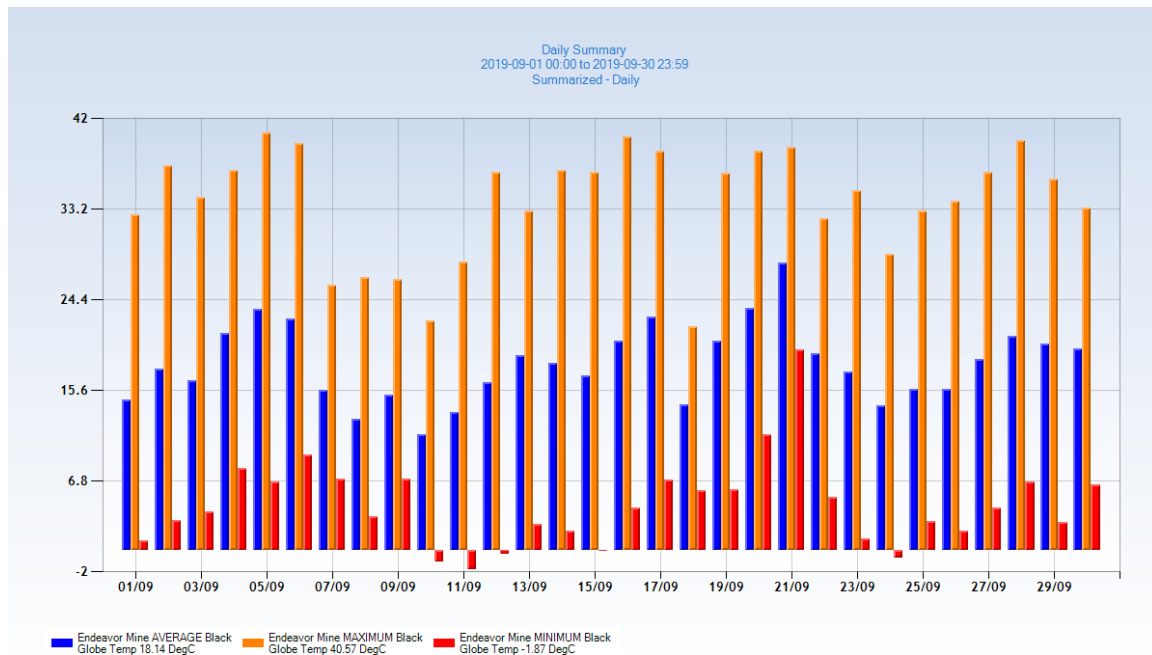


Figure 2.4 Min, Max and Ave Black Globe Temperature for September 2019

### 2.4 Thermal Work Limit

TWL is calculated using five environmental parameters – dry bulb, wet bulb and globe temperatures, with the addition of wind speed and atmospheric pressure. It also accommodates for clothing factors to arrive at a prediction of a safe maximum continuously sustainable metabolic rate (W/m<sup>2</sup>) for the conditions.

#### Thermal Work Limit - Working Zones

Control Interventions, Rest-Work and Rehydration Schedules


Working Zones	Interventions	Rehydration Schedule (per hr)	Work-rest Schedule (minutes)
Low Risk Unrestricted Zone TWL: 140 - 220 <	No limits on self-paced work <sup>a</sup> for educated, hydrated workers.	Light Work 600 ml - 1 Litre / hr	Safe for all continuous self-paced work <sup>a</sup>
Medium Risk Cautionary Zone TWL: 115 - 140	<b>Cautionary zone indicates situations in which environmental conditions require additional precautions.</b> <ul style="list-style-type: none"> <li>Practicable Engineering control measures to reduce heat stress should be implemented e.g. provide shade, improve ventilation etc.</li> <li>Working alone to be avoided</li> <li>No unacclimatised person to work<sup>b</sup></li> <li>Ensure adequate fluid intakes appropriate for type of work</li> </ul>	Light Work 1 - 1.2 Litres / hr	Safe for continuous self-paced light work <sup>a</sup>
		Heavy Work > 1.2 Litres / hr *	Continuous paced work 45 work - 15 rest
High Risk Zone TWL: < 115	<ul style="list-style-type: none"> <li><b>Strict Work/Rest cycling required</b></li> <li>No person to work alone</li> <li>No unacclimatised person to work<sup>b</sup></li> <li>High Risk induction required emphasising hydration and identifying signs of heat strain</li> <li>Provide personal water bottle (2 litre capacity) on-site at all times</li> </ul>	All Work > 1.2 Litres / hr *	Light work <sup>c</sup> 45 work - 15 rest
			Heavy work <sup>d</sup> 20 work - 40 rest

Figure 2.5 Thermal Work Limit Working zones chart



## Monthly Environmental Report

For Month Ending 30 September 2019

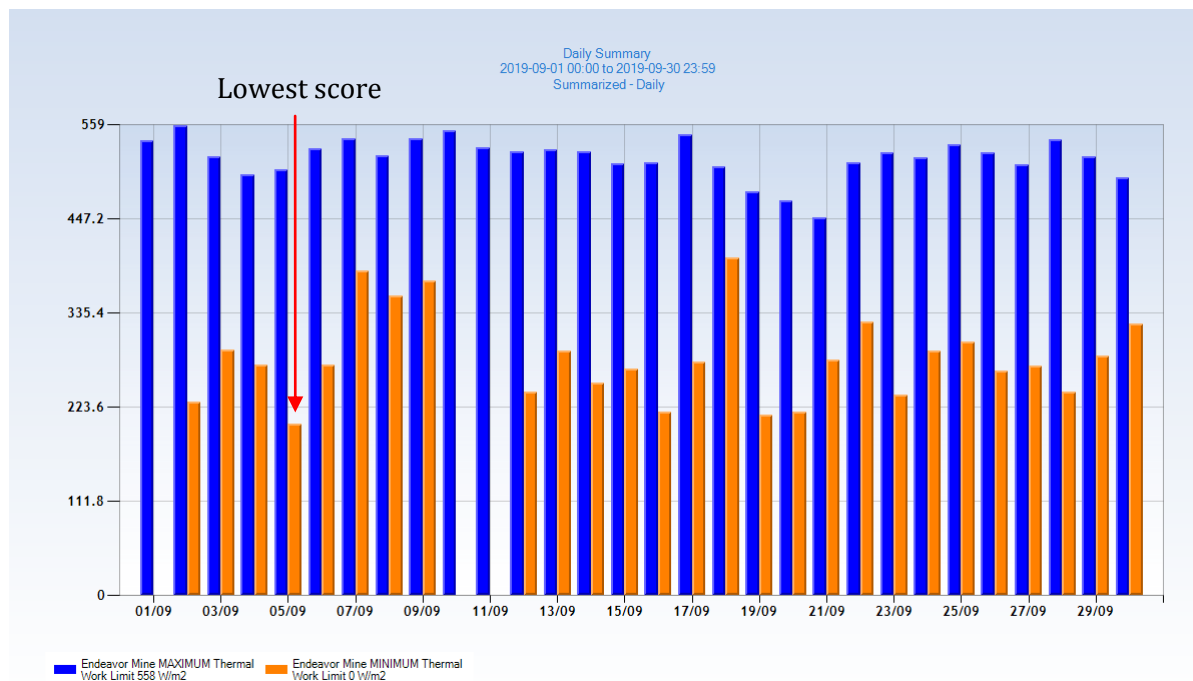

**Figure 2.6** Thermal Work Limits: Maximum and Minimum Levels for September 2019

The lower the reading the more risk to human health. As shown in Figure 2.6 that during September 2019, the lowest score was 202.53 W/m<sup>2</sup> which is a low risk.

## 2.5 Rainfall

### 2.5.1 Rainfall: Data and Discussion

There was 1.6 mm of rainfall at Endeavor Mine during September 2019 (Table 2.1). Year to Date (YTD) is shown in Table 2.2. The only rain event recorded was on the 17<sup>th</sup> of September with 1.6 mm.

**Table 2.1** Rain Gauge Total for September 2019


Date	TOTAL Rain Gauge - mm	Date	TOTAL Rain Gauge - mm
1/09/2019	0	17/09/2019	1.6
2/09/2019	0	18/09/2019	0
3/09/2019	0	19/09/2019	0
4/09/2019	0	20/09/2019	0
5/09/2019	0	21/09/2019	0
6/09/2019	0	22/09/2019	0
7/09/2019	0	23/09/2019	0
8/09/2019	0	24/09/2019	0
9/09/2019	0	25/09/2019	0
10/09/2019	0	26/09/2019	0
11/09/2019	0	27/09/2019	0
12/09/2019	0	28/09/2019	0

## Monthly Environmental Report

For Month Ending 30 September 2019

Date	TOTAL Rain Gauge - mm	Date	TOTAL Rain Gauge - mm
13/09/2019	0	29/09/2019	0
14/09/2019	0	30/09/2019	0
15/09/2019	0		
16/09/2019	0		
Total rain gauge mm September			1.6

YTD for 2019 as of September 30<sup>th</sup>, 2019 is 172.2 mm compared to 2018 with 21.4 mm as of September 2018. 3.0 mm rainfall was recorded during September 2018.

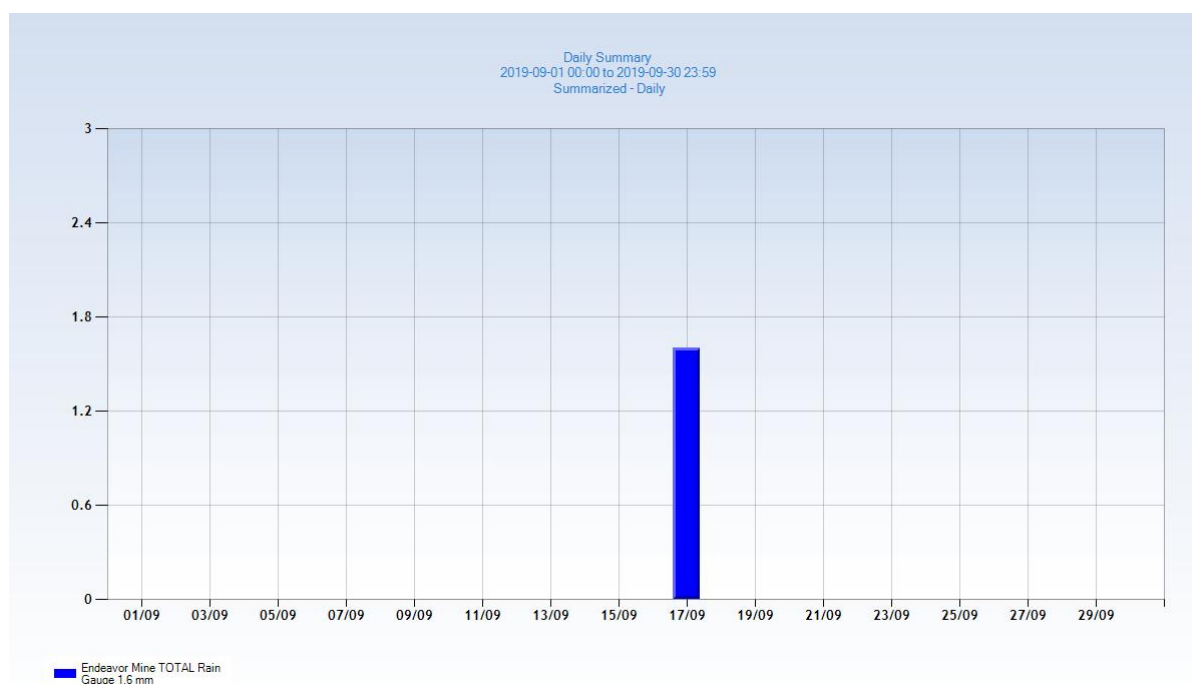

**Figure 2.7** Rain Gauge Total for September 2019

**Table 2.2** YTD Rainfall for Cobar, NSW (01/01/2019 to 30/09/2019)

2019			
<b>January</b>	19 mm	<b>July</b>	9.8 mm
<b>February</b>	34.2 mm	<b>August</b>	0.2 mm
<b>March</b>	18.2 mm	<b>September</b>	1.6 mm
<b>April</b>	75.2 mm	<b>October</b>	0 mm
<b>May</b>	13.2 mm	<b>November</b>	0 mm
<b>June</b>	0.8 mm	<b>December</b>	0 mm
		<b>YTD</b>	<b>172.2mm</b>

## 2.6 Wind

Wind can play a critical role in a site's environmental performance, particularly with dust deposition and noise depending on wind direction. Wind direction is reported by the direction from which it originates. For example, a northerly wind blows from the north to the south.

## Monthly Environmental Report

For Month Ending 30 September 2019

Wind direction is usually reported in cardinal directions or in azimuth degrees. The predominant wind direction for the Cobar region is East or North East, but will come from the North occasionally West during the hotter periods. Peak Wind is defined as, "The highest wind speed observed at the station" during a given 24-hour period of time". This is a measurement of a burst or a gust of wind that one feels over a very short period of time. In the case of the peak wind, the very short period of time is usually three seconds.


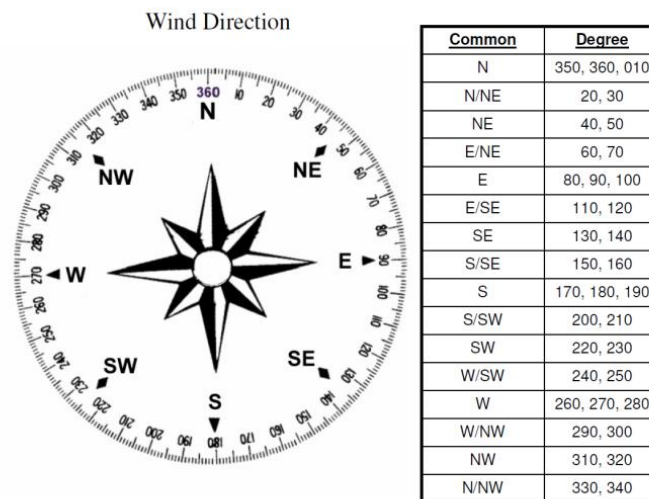


Figure 2.8 Wind rose example

### 2.6.1 Wind Speed and Wind Gusts: Data and Discussion


As shown in Figure 2.9, the average wind speed for September 2019 was 8.12km/h with a maximum wind speed of 37.4 km/h and a maximum wind gust of 50.9 km/h.

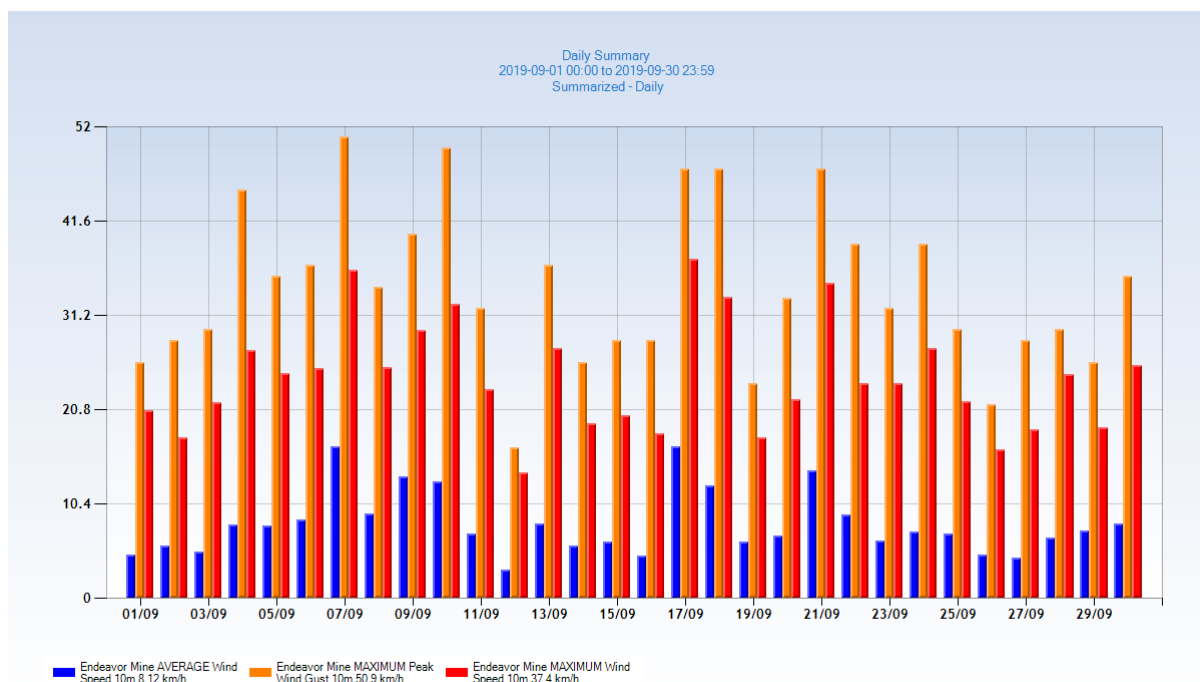

**Figure 2.9** Average Wind Speed, Maximum Wind Speed and Maximum Wind Gusts for September 2019

### 2.6.2 Wind Direction: Data and Discussion

Wind patterns continued to be more orientated blowing from the South/South West (SSW), and becoming orientated blowing from South (S) and from the South West (SW). Figure 2.10 illustrates the Wind Rose for the Endeavor Mine for September 2019.

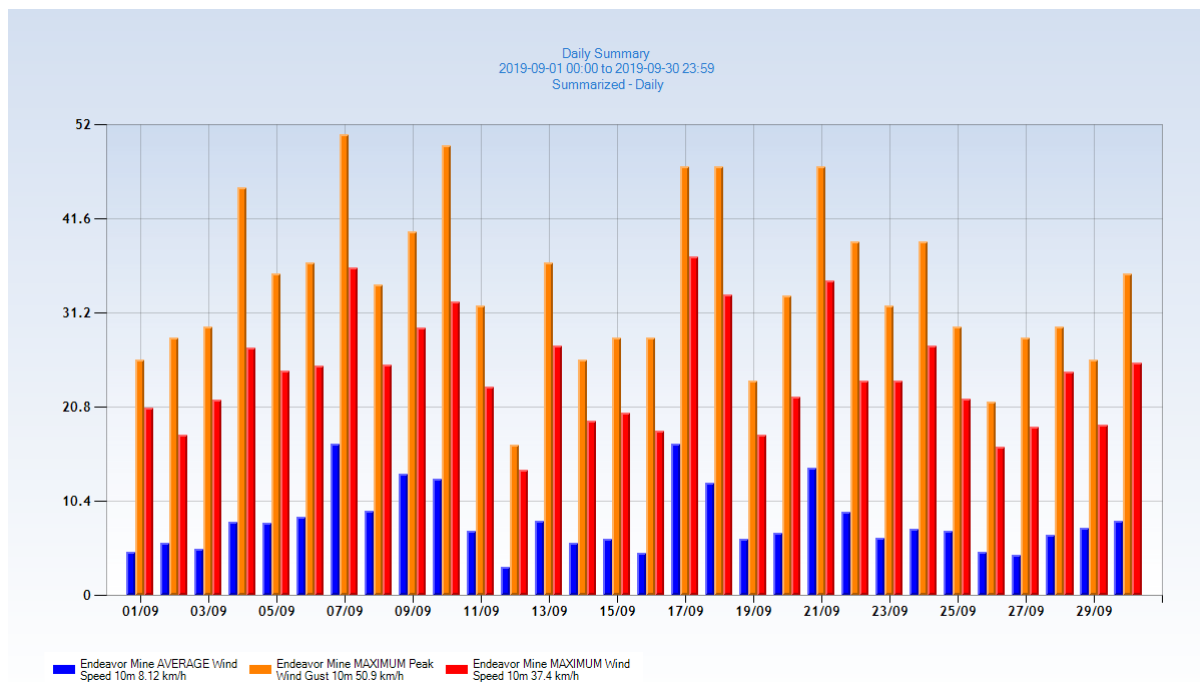


**Figure 2.10** Wind Rose for the Endeavor Mine for September 2019

### 2.7 Solar Radiation

The Maximum Solar Radiation measurement for September was 1011.9 Watts/m<sup>2</sup> (Figure 2.11) on the 28<sup>th</sup> of September, which was higher than August 2019.

## Monthly Environmental Report

For Month Ending 30 September 2019

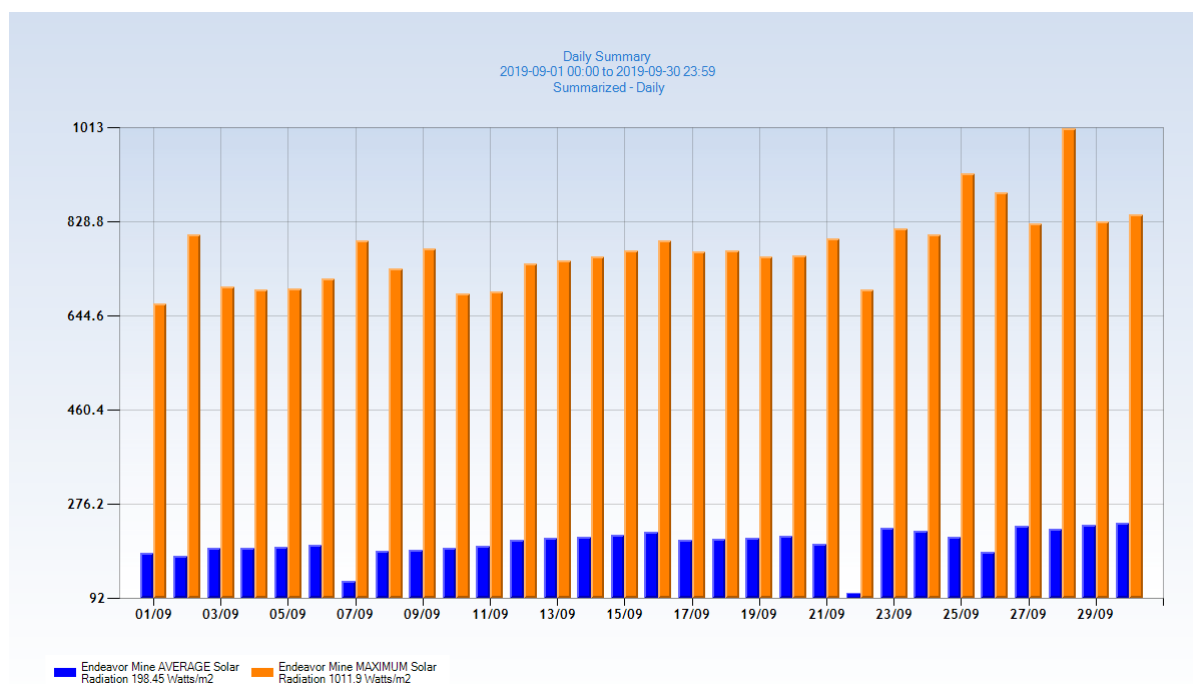

**Figure 2.11** Daily Solar Radiation Levels (Ave and Max) September 2019

## 2.8 Rate of Evaporation

The Measurement of Evaporation Rate is defined as the amount of water which evaporates from an open pan called a Class A pan. The rate of evaporation depends on factors such as cloudiness, air temperature and wind speed. It is measured in millimetres of fluid evaporated per hour. The mean evaporation rate for the Endeavor Mine is 1953mm – 6 times the annual rainfall.

### 2.8.1 Rate of Evaporation: Data and Discussion

As shown in Table 2.3 and Figure 2.12, evaporation rates for September are higher than the ones obtained for August, this is due to a slightly increase in the temperature in some days, increasing humidity and solar radiations, in addition to low rainfall throughout the month. The Highest evaporation was observed on the 17<sup>th</sup> of September with a rate of 6.13 mm. Total evaporation for September was 112.43 mm. Historically, a reduction in evaporation coincides with a reduction in rainfall. Evaporation is a critical tool in the management of tailings supernatant.


**Table 2.3** Total Daily Evaporation Rates for September 2019

Date	TOTAL Daily Evaporation - mm	Date	TOTAL Daily Evaporation - mm
1/09/2019	2.73	16/09/2019	3.82
2/09/2019	3.03	17/09/2019	6.13
3/09/2019	3.2	18/09/2019	2.92
4/09/2019	4.32	19/09/2019	3.38
5/09/2019	4.53	20/09/2019	3.7
6/09/2019	4.6	21/09/2019	5.92

## Monthly Environmental Report

For Month Ending 30 September 2019

Date	TOTAL Daily Evaporation - mm	Date	TOTAL Daily Evaporation - mm
7/09/2019	3.66	22/09/2019	2.99
8/09/2019	2.7	23/09/2019	3.75
9/09/2019	3.31	24/09/2019	3.69
10/09/2019	3.17	25/09/2019	3.53
11/09/2019	2.9	26/09/2019	2.91
12/09/2019	3.02	27/09/2019	3.8
13/09/2019	4.17	28/09/2019	4.31
14/09/2019	3.54	29/09/2019	4.47
15/09/2019	3.78	30/09/2019	4.45
<b>Total evaporation September 2019</b>			<b>112.43</b>

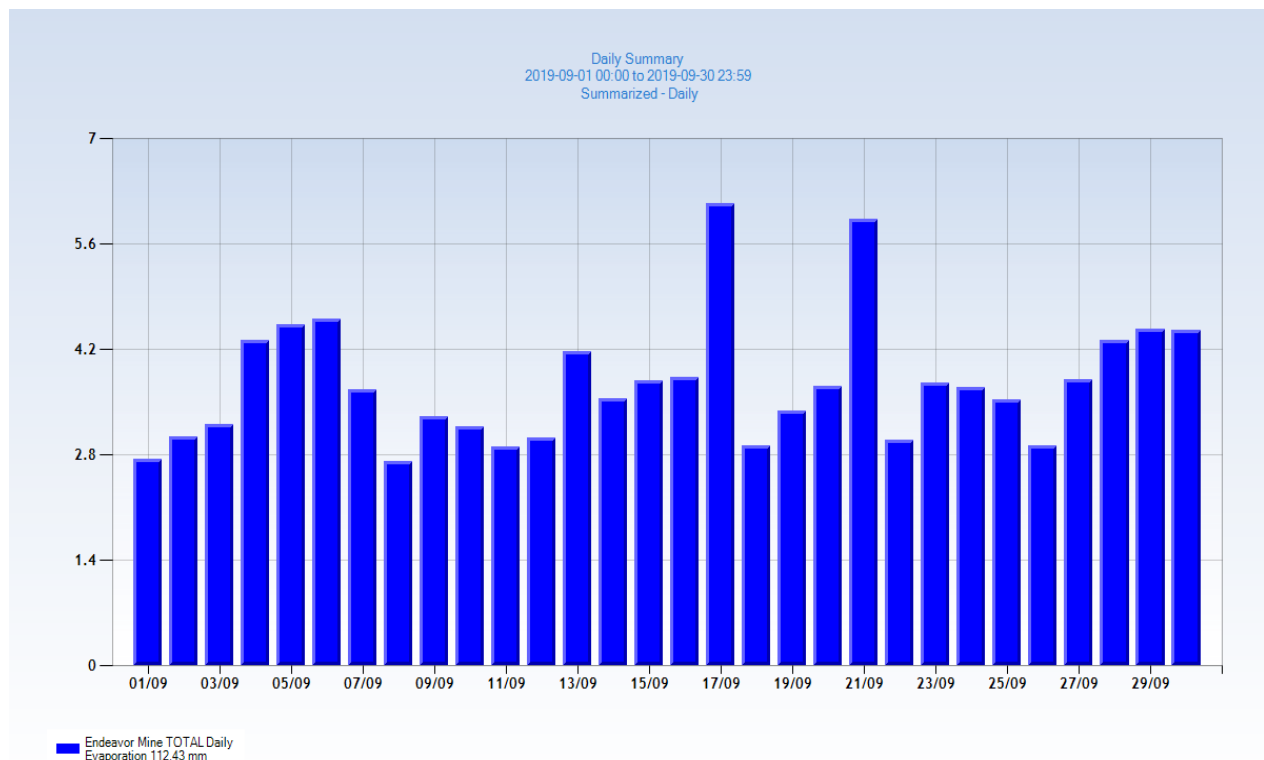

**Figure 2.12** Daily Evaporation Rates for September 2019.

### 3 MONITORING REQUIREMENTS

#### 3.1 Dust Monitoring

Air quality aspects and impacts associated with site operations are managed in accordance with the Air Quality Management Plan (END-PLN-ENV-006) and the requirement detailed in NSW Environmental Protection Licence 1301.

The Endeavor Mine is located 47 km from the nearest town (Cobar) and 4.5 km away from its nearest sensitive receptor (residential property). Therefore, dust deposition at these potential receptors is considered a low environmental risk.

Nevertheless, dust deposition on and beyond the boundary of the lease has the potential to cause environmental harm. Therefore Endeavor Mine manages airborne contaminants on site through the use of water sprays and water trucks with depositional dust monitoring stations strategically located along the boundary of ML158/159/160/161 to measure performance.



**Figure 3.1** Dust monitoring gauge located in the project

##### 3.1.1 Dust Monitoring Methodology and Limits

The Endeavor Mine Dust Monitoring Program measures dust deposition rates on a monthly basis at the main mining lease boundary (4 locations) and at a background location located 11km from the operating mine site (DDG 5 – Point ID 5). EP Licence 1301 does not set limits for dust deposition. However, these results are compared to the recommended limits outlined in *Approved Methods and Guidance for the Modelling and Assessment of Air Pollutants in NSW 2005*. This guidance document recommends that the deposition rate for total insoluble matter when

## Monthly Environmental Report

For Month Ending 30 September 2019

---

expressed as a 12 month rolling average should not exceed 4 g/m<sup>2</sup>/month and that site activities should not generate dust emissions which result in a dust deposition rate greater than 2 g/m<sup>2</sup>/month above background levels on a annual average. Table 3.1 describes the Pollutant, Units of Measure, Monitoring Frequency and Method of Sampling.

### 3.1.2 Monitoring Locations

**Table 3.1** Endeavor Mine Air Monitoring Requirements

Point ID	Pollutant	Unit of measure	Frequency	Sampling Method
1	Particulates - Deposited matter	grams per square metre per month	Monthly	AM-19
2	Particulates - Deposited matter	grams per square metre per month	Monthly	AM-19
3	Particulates - Deposited matter	grams per square metre per month	Monthly	AM-19
4	Particulates - Deposited matter	grams per square metre per month	Monthly	AM-19
5	Particulates - Deposited matter	grams per square metre per month	Monthly	AM-19

As shown in the satellite image (**Figure 3.2**), there are 5 dust monitoring locations on the boundary of the lease, with one located 11kms from the site at the turnoff to the Mine site near the Louth Road. This station was positioned to establish background levels.





**Figure 3.2 Endeavor Mine Dust Monitoring Locations**

### 3.2 Dust Monitoring Data and Discussion

This report shows the results from the dust monitoring activities carried during the July and August 2019 (Table 3.3) and the results from the monitoring for the month of September 2019 (Table 3.3).

**Table 3.2. Dust monitoring results from July and August 2019.**

Monitoring locations (Monitoring from 11/07/2019 to 09/09/2019)						
Parameters	Unit	DDG1	DDG2	DDG3	DDG4	DDG5
Total soluble matter	g/m2*month	0.6	0.3	0.5	0.6	0.5
Total insoluble matter	g/m2*month	1.4	0.6	0.6	1.2	0.5

## Monthly Environmental Report

For Month Ending 30 September 2019

<b>Dissolved lead</b>	<b>mg/l</b>	0.02	0.002	<0.001	0.004	<0.001
-----------------------	-------------	------	-------	--------	-------	--------

**Table 3.3. Dust monitoring results from September 2019**

	<b>Monitoring locations (Monitoring from 09/09/2019 to 07/10/2019)</b>					
<b>Parameters</b>	<b>Unit</b>	<b>DDG1</b>	<b>DDG2</b>	<b>DDG3</b>	<b>DDG4</b>	<b>DDG5</b>
<b>Total soluble matter</b>	<b>g/m2*month</b>	1.1	0.9	0.7	1.7	1.1
<b>Total insoluble matter</b>	<b>g/m2*month</b>	1.7	1.3	0.9	1.5	1
<b>Dissolved lead</b>	<b>mg/l</b>	0.02	0.002	<0.001	0.004	<0.001

### 3.3 Groundwater Monitoring

Deep regional groundwater flows to the south west, conforming to the structural dip of the underlying sedimentary rocks. Groundwater inflow into the mine is observed at a depth range of between 60 to 80 m below ground surface. A shallow, perched aquifer occurs in the vicinity of the Central Tailings Discharge CTD between approximately 0.5 to 13 m below ground surface. This aquifer is recharged by rainfall and seepage water from the operational TSF via a permeable gravelly soil layer in the area.

A review of groundwater characteristics undertaken by consultants Environmental Earth Sciences (EES) in 2013 indicates there is no interface between the shallow perched water and the deep regional aquifer.

Groundwater quality at the mine is generally poor due to the high salinity. The water has been sampled by NSW Water Conservation and Irrigation for the original Environmental Impact Statement (EIS) could be considered “brackish” and was found to have an electrical conductivity (EC) of 26,000  $\mu\text{S}/\text{cm}$  (sea water is approximately 30,000  $\mu\text{S}/\text{cm}$ ). Further, it was noted that the water was not suitable for stock, domestic or farm use. Potential contamination of the groundwater would be of low risk due to the naturally poor quality of the water.

#### 3.3.1 Monitoring Locations

Endeavor Mine’s groundwater monitoring locations are concentrated around the perimeter of the Central Tailings Discharge (CTD) and the Sector 5 Tailings Storage Facility (CTF), while surface water monitoring locations are focused on water storages that could potentially discharge to environment during a major rain or storm event. Table 3.4 describes the monitoring stations, where Figure 3.3 shows the locations of the piezometers. Depending on availability of water or flow, unfortunately on some occasions, piezometers cannot be monitored as a result of being dry. Parameters to be monitored are described in Table 3.5.

**Table 3.4 EPA Monitoring Stations**

<b>EPA ID</b>	<b>Type of monitoring point</b>	<b>Location description</b>
<b>9</b>	Groundwater monitoring point	PZ Labeled as BH02
<b>10</b>	Groundwater monitoring point	PZ Labeled as BH02B
<b>11</b>	Groundwater monitoring point	PZ Labeled as BH03

## Monthly Environmental Report

For Month Ending 30 September 2019

EPA ID	Type of monitoring point	Location description
12	Groundwater monitoring point	PZ Labeled as BH06
13	Groundwater monitoring point	PZ Labeled as BH08A
14	Groundwater monitoring point	PZ Labeled as BH09
15	Groundwater monitoring point	PZ Labeled as BH10
16	Groundwater monitoring point	PZ Labeled as BH10B
17	Groundwater monitoring point	PZ Labeled as BH12B
18	Groundwater monitoring point	PZ Labeled as BH14
19	Groundwater monitoring point	PZ Labeled as BH15
20	Groundwater monitoring point	PZ Labeled as BH16
25	Groundwater monitoring point	PZ Labeled as BH13

**Table 3.5** EPA Monitoring Stations

Pollutant	Unit of measure	Frequency	Sampling method
Arsenic	milligrams per litre	Quarterly	Representative sample
Cadmium	milligrams per litre	Quarterly	Representative sample
Calcium	milligrams per litre	Quarterly	Representative sample
Chloride	milligrams per litre	Quarterly	Representative sample
Copper	milligrams per litre	Quarterly	Representative sample
Cyanide (total)	milligrams per litre	Quarterly	Representative sample
Electrical conductivity	milligrams per litre	Quarterly	Representative sample
Iron	milligrams per litre	Quarterly	Representative sample
Lead	milligrams per litre	Quarterly	Representative sample
Magnesium	milligrams per litre	Quarterly	Representative sample
Manganese	milligrams per litre	Quarterly	Representative sample
Mercury	milligrams per litre	Quarterly	Representative sample
pH	pH	Quarterly	Representative sample
Potassium	milligrams per litre	Quarterly	Representative sample
Sodium	milligrams per litre	Quarterly	Representative sample
Standing water level	metres	Quarterly	Representative sample
Sulfate	milligrams per litre	Quarterly	Representative sample
Total dissolved solids	milligrams per litre	Quarterly	Representative sample
Zinc	milligrams per litre	Quarterly	Representative sample



# Monthly Environmental Report

For Month Ending 30 September 2019



**Figure 3.3** Location of the Piezometer Monitoring Locations

## 3.3.2 Monitoring Results Discussion

## Monthly Environmental Report

For Month Ending 30 September 2019

**Table 3.6 Groundwater quarterly quality analysis (September 2019)**

Parameter	Unit	EPA 9	EPA 10	EPA 11	EPA 12	EPA 13	EPA 14	EPA 15	EPA 16	EPA 17	EPA 18	EPA 19	EPA 20	EPA 25
		BH 02	BH 02B	BH 03B**	BH 06	BH 08A	BH 9	BH 10	BH 10B	BH 12B	BH1 4	BH 15	BH1 6	BH 13B**
As	mg/L	0.08	0.062	0.01	2.42	0.002	0.007	-*	0.006	0.009	0.007	-*	0.003	0.016
Cd	mg/L	<0.0001	<0.0001	<0.0001	<0.0001	<0.0001	<0.0001	-*	<0.0001	<0.0001	0.0001	-*	<0.0001	<0.0001
Ca	mg/L	624	583	464	592	774	562	-*	591	861	571	-*	661	934
Cl	mg/L	3060	4240	10100	2790	8100	2200	-*	2840	8370	3010	-*	3330	8370
Cu	mg/L	<0.001	<0.001	<0.001	<0.001	0.001	0.002	-*	0.001	<0.001	0.002	-*	<0.001	<0.001
Total CN	mg/L	<0.004	<0.004	<0.004	<0.004	<0.004	<0.004	-*	<0.004	<0.004	<0.004	-*	<0.004	<0.004
EC	µS/cm	15500	19400	28200	15700	28900	15200	-*	20000	29200	17100	-*	14300	28700
Fe	mg/L	2.87	<0.05	4.63	622	<0.05	<0.05	-*	<0.05	<0.05	<0.05	-*	13.9	2.45
Pb	mg/L	<0.001	0.002	<0.001	<0.001	<0.001	0.035	-*	0.002	<0.001	0.006	-*	0.002	0.002
Mg	mg/L	986	1230	1270	1360	1300	1500	-*	1880	1370	1580	-*	530	1690
Mn	mg/L	11	5.25	4.04	12.2	13	5.33	-*	8.46	0.671	0.03	-*	20.4	25
Hg	mg/L	<0.0001	0.0001	<0.0001	<0.0001	<0.0001	0.0004	-*	<0.0001	<0.0001	<0.0001	-*	<0.0001	<0.0001
pH	pH Unit	7.21	7.37	7.36	6.31	7.39	7.5	-*	7.61	7.42	7.55	-*	6.9	7.43
K	mg/L	112	113	227	94	185	241	-*	201	264	156	-*	87	185
Na	mg/L	1920	2600	5610	1610	4430	2510	-*	2540	4520	1890	-*	2190	4100
Standing water level	m	3.4	4.22	3.75	3.8	4.96	3.93	11.96	5.8	8.3	6.35	12.8	4.46	3.5
S	mg/L	5080	5820	5470	6880	5490	8060	-*	8670	5830	6970	-*	3390	5960
TDS	mg/L	12700	16200	25500	13700	22200	18400	-*	15800	23500	15600	-*	11700	21900
Zn	mg/l	<0.005	0.006	0.008	0.762	0.073	0.08	-*	0.014	0.408	0.049	-*	0.298	0.016

\* Not enough water to sample

\*\* Not enough water to sample BH03 and BH13, for quality analysis sample obtained from BH03B and BH13B, respectively same location but deeper.

## 4 SURFACE WATER

Surface water is categorised in two the following categories:

**Clean Water:** Water that has not been degraded by contact with mine operations and is of a suitable quality for release to the off lease receiving environment. Clean water includes: Raw Water, Potable Water, and Clean Stormwater. However in an arid and water starved environment like the Cobar Shire, water is reused and recycled at every opportunity.

**Contaminated Water:** water containing potential contaminants or pollutants and not fit for discharge, water that has had contact mining and ore processing operations. Contaminated water includes: Process Water, Tailings Supernatant, Mine Water, and Contaminated Stormwater.

### 4.1 Monitoring Methodology

Although not part of the legislative commitments, Endeavor monitors surface waters on the lease as part of its internal and operational commitment. The site does not release any water directly into the environment. It operates with a closed circuit. However Endeavor remains vigilant in understanding the risks associated of impacted surface water. The main surface water monitoring point is the Evaporation Pond which is measured monthly (when possible) (Volumes and pH) and biannually along with all other site dams for pH, electrical conductivity (EC), total dissolved solids (TDS), Cations (Ca, Mg, Na, K, ionic balance), Anions (SO<sub>4</sub>, Cl, alkalinity, flouride), Cyanide (total) and dissolved metals (As, Cd, Cr, Cu, Pb, Ni, Mn, Zn, Al, Fe, Se, Hg).

### 4.2 Monitoring Locations

Figure 4.1 shows the location of the surface water dams on site that are monitored for water quality bi-annually.





**Figure 4.1** The Endeavor Mine: Main Water Storages


### 4.3 Surface Water: Data and Discussion

Due to the drought and low rainfall during the month of August, it is difficult to access water in most of the dams with the exception of the Retention Dam. Access to the water's edge is hazardous. If rain occurs during future months samples will be taken, if possible.

## 5 RAW WATER USAGE

The Cobar Water Board supplies raw water to the Endeavor Mine via a pipeline along the rail corridor. This water is sourced from Burrendong Dam (right) via a system of open channels, weirs and pipelines. Endeavor Mine currently holds a high security license for 1,280 ML per annum, with average usage being 58,000KL per month. Supply of this water is controlled by the Cobar Water Board. The licensed volume of water is generally sufficient to support mining operations. If required, an above allocation water purchase can be made through the CWB depending on the level of drought and/or water restrictions placed on the area.

Raw water is reticulated across site for use as make up water for the Retention Dam (process water) and for “clean water” uses such as vehicle and equipment wash down and dust suppression. Raw water is initially stored in 5ML holding tank from where it is distributed to either: the raw water system, the potable water treatment plant or the fire water reticulation system (Figure 5.1).

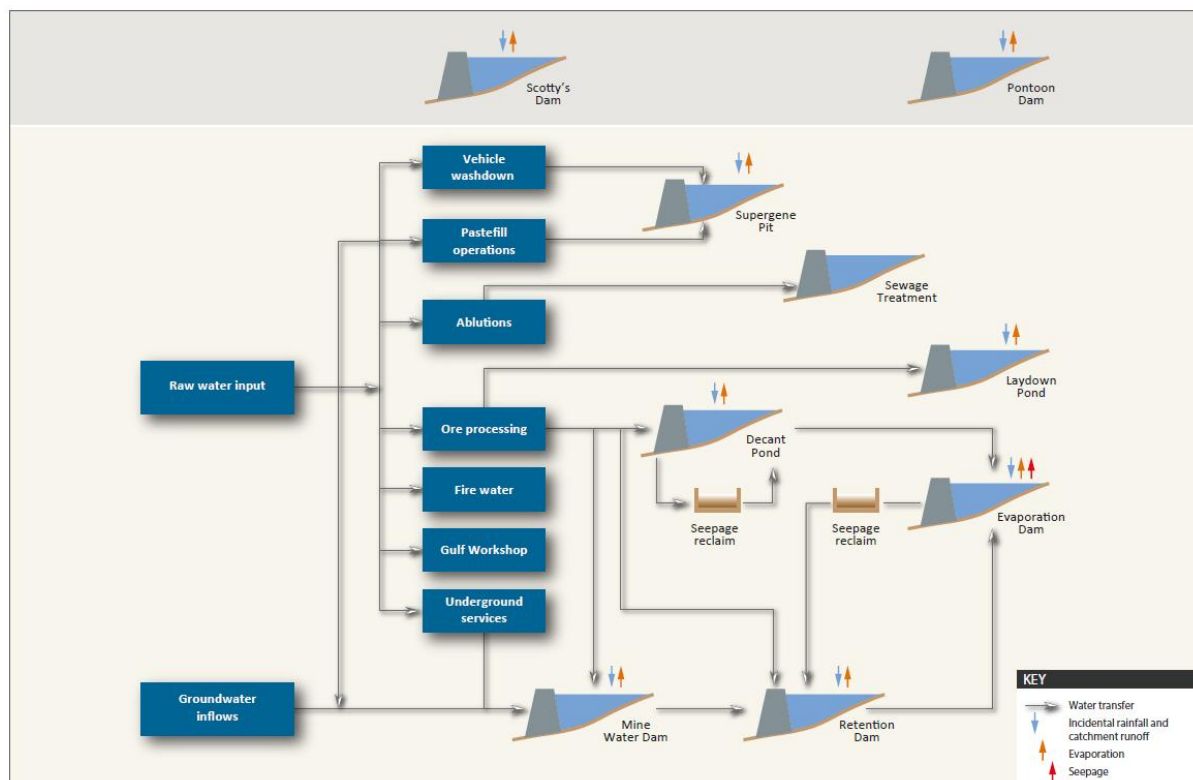

**Figure 5.1** Endeavor Raw and Process Water flows

## 5.1 Monitoring Methodology

Joint readings by personnel from Endeavor Mine Environmental Department and the Cobar Shire Council are conducted monthly.

## 5.2 Raw Water: Data and Discussion

Table 5.1 shows water usage year to date usage as well as usage for September 2019. Less water was used during September compared to previous months in 2019. This is due to a reduction in production at the mine, paste fill and milling operations. Due to the ongoing and severe drought conditions, Endeavor has commenced a program to source water from other potential sources.

**Table 5.1** Raw Water Use for September 2019

Date	YTD (KL)	Usage (KL) for September 2019
30/09/2019	481336	24872

## 6 NOISE MANAGEMENT

Environmental Noise is the propagation of noise with harmful impact on the activity of human or animal life. According to the WHO, sound levels less than 70dB are not damaging to living organisms, regardless of how long or consistent the exposure. Exposure for more than 8 hours



to constant noise beyond 85dB is deemed hazardous. A “Nuisance” noise is a noteworthy and unreasonable amount of sound from neighbouring properties or premises.

Endeavor Operations has never received a noise complaint from its neighbours. The closest sensitive receptor (neighbouring property) is Poon Boon Station, which is located 4.5 kms away from operations and has never reported a complaint for noise, dust, vibration or visual amenity. The predominant wind direction is from the east to north-east, therefore; the greatest potential noise risk is for ‘Bundella’, 11.8 km from the mine. Again, no complaints have been registered.

### 6.1 Noise and Vibration Assessment

If a noise complaint is registered, Endeavor Mine will identify the acoustic values where a potential source is emanating as well as determine background levels at the nearest sensitive receptor (nearest Property).

Acoustic values to be measured and considered include:

- Health and biodiversity of ecosystems;
- Human health and wellbeing, including ensuring a suitable acoustic environment for individuals to sleep, study or learn, and be involved in recreation, including relaxation and conversation; and
- The amenity of the community.

The noise and vibration assessment will involve the identification of a baseline noise environment, modelling of potential noise sources and assessment of potential impacts associated with the operation. Any impact assessment will be based on likely sources including indicative operating equipment.

#### 6.1.1 Neighbours (Sensitive Receptor)

A sensitive receptor is considered to be a location in the vicinity of the operation, where noise December affect the amenity of the land use.

#### 6.1.2 Noise Management Plan

Based on the results of the assessment, a noise management plan is in place to address how plan activities will be carried out, according to best practice noise management principles.

Best-practice noise management principles include:

- Noise impact assessments and emission calculations;
- Administration of activities;
- Stakeholder engagement;
- Adoption of noise attenuating technologies for plant and equipment (if practicable);
- Minimising background creep; and
- Containing and minimising variable noise;

### 6.2 Monitoring Locations

Potential Monitoring locations will include neighbouring properties. Figure 6.1 shows the location of the neighbouring properties.



**Figure 6.1** Closest Neighbours to Endeavor Mine

### 6.3 Noise Monitoring: Data and Discussion

No noise complaints were registered during September 2019. The Noise Management Action Plan was not activated. Year to date, Endeavor Mine has received no complaints regarding noise or any other nuisance issue.

## 7 WASTE MANAGEMENT

Endeavor Mine has developed and implemented a Waste Management Plan to provide a framework for managing process and non-process wastes, both liquid and solid, excluding waste rock, overburden and tailings. Detailed internal procedures are used to support both the operation and maintenance of the waste. The primary objectives are to:

- Reduce potential health and environmental risks associated with waste generation and disposal;
- Promote the efficient use and conservation of resources, reduce the need for waste treatment facilities and reduce the requirement for raw materials;
- Minimise the use of hazardous materials and seek safer alternative materials where possible;
- and

## Monthly Environmental Report

For Month Ending 30 September 2019

Comply with statutory requirements, specifically the conditions set out in Environmental Protection Licence 1301 and site Mining Leases and other statutory requirements.

As stated in EP1301, Endeavor Mine “*must not cause, permit or allow any waste to be received at the premises, except the wastes expressly meeting the definition as stated in its License*”. Any waste received at the premises must only be used for the activities referred to in relation to that waste in the column titled “Activity” in the Table 7.1. Any waste received at Endeavor Mine is subject to the limits or conditions.

**Table 7.1** Requirements for the Storage and Handling of Waste under EP 1301

Code	Waste	Description	Activity	Other Limits
NA	General specific exempted waste or	Waste that meets all the conditions of a resource recovery exemption under Clause 51A of the Protection of the Environment Operation (Waste) Regulation 2005.	As specified in each particular resource recovery exemption.	NA
NA	Waste	Any waste received on site that is below licensing thresholds in Schedule 1 of the POEO Act, as in force from time to time.	-	NA

### 7.1 Waste Management: Data and Discussion

During September 2019, EOPL continued with the implementation and waste management described in previous reports, no further actions have been implemented during this month. General waste collection by a contractor has been carried regularly and other waste types such as used oil, hydrocarbon contaminated material, used batteries, among others has been collected and disposed by an approved contractor.

## 8 TAILINGS DEPOSITION

Tailings (also known as tails or residue) are the material left over after the process of separating the valuable fraction from the uneconomic fraction (waste) of the ore. Tailings are distinct from overburden or waste rock or other material that overlies an ore or mineral body and is displaced during mining without being processed.

The volumes of tailings can be large and require an engineered storage and capacity to safely house them, Depending on the nature of the ore or the type of extraction process, tailings can have the potential to harm the environment unless they are deposited and managed correctly.

The reporting of monthly tailings deposition is a legislative requirement as part of EP 1301.

### 8.1 Tailings Deposition: Data and Discussion

Table 8.1 shows the volumes of tailings deposited for September 2019. All tailings were deposited in the CTD TSF. Tailings were deposited in Sector 3 and 4.

**Table 8.1** Tailings Deposition for September 2019

	Environment Protection Licence Monitoring Point 7		Environment Protection Licence Monitoring Point 8		TOTAL
	Volume of tailings deposited (m <sup>3</sup> )	Mass of tailing solids deposited (DMT)	Volume of tailings deposited (KL)	Mass of tailing solids deposited (DMT)	Mass of tailing solids deposited (DMT) YTD
September 2019	14045	14895	0	0	<b>202435</b>

## 9 TAILINGS DAM SURVEILLANCE

Endeavor Mine undertake daily and weekly surveillance of the CTD TSF for signs of anomalies to tailings deposition, the freeboard, interception trenches, slope stability and erosion. During September 2019, there were no visible signs of leaching, seepage or cracks in the external embankment of the CTD TSF. Introduction of the central discharge platform (Eyebolt) has allowed for a more even distribution of slurry and more even beaching of tails. Standing water levels are measured for the presence of water in and around walls as well quarterly groundwater sampling and analysis. Monthly Tailings Dam management Meetings are held to discuss any issues arising from inspections as well as discuss current and future works and projects. Minutes are kept and provided to Regulatory Authorities on request.

### 9.1 Discussion

There were no visible signs of seepage in the interception trench at all sections of outside of the external embankment during September 2019. A series of Piezometers installed along the perimeter of the external embankment are monitored regularly to determine any potential seepage through the embankment. All of the "Lift" Piezometers monitor for signs of moisture using a standing water level gauge. No water was detected during the monitoring of the Lift Piezometers.

## 10 WASTE ROCK MANAGEMENT

EOPL has been diligently working to maximise its mineral resource to extend its current mine life beyond 2023. This exploration program is critical to the future of Endeavor Mine's shareholders, employees, contractors, the township of Cobar and all those who provide direct and indirect support to the operations. Exploration drilling has indicated that the mine ore body is available at depth and requires further investigative drilling for confirmation. For this to occur, an extension to the mine decline (main access pathway) is required to access this potential ore body. As a result, waste rock is produced. But due to the volumes involved, there is a need to temporarily stockpile the waste rock on the surface. Due to the quality of this waste rock, much of it may have a beneficial use in the long term or post mining land use.

The storage of waste rock is within the catchment of the Sector 5 TSF. The material is placed on oversized tails and was assessed for geotechnical stability. The bottom up building approach is being applied in the construction which allows for the base batter of 5 metres and any change in volume will impact the top bench, which can be easily reshaped. Due to the nature of the tailings base, a layered approach was used as recommended by Golder Associates Pty. Ltd.

## **11 REHABILITATION AND RESEARCH**

As the majority of the site will remain active for the life of the mine, only limited progressive rehabilitation is possible. However extensive planning and research into the rehabilitation of facilities such as the tailings dams are planned.

There are several significant projects being explored:

- High Density Hard Pan Capping (HDHPC); and
- Sustainable Development in Post Mining Land Use (PMLU)

Endeavor Mine is currently in discussion with industry experts to look at collaborative research into sustainable final and post mining landforms. Once further information is obtained it will be described in this section.

### **11.1 Discussion**

Endeavor Mine in an intermediate stage in Phase 1 of a program exploring scientifically feasible options for a final land form solutions for the Central Tailings Discharge Tailings Storage Facility (CTD TSF) and the Sector 5 TSF. This involves in-lab and field trials for biological analysis and bio-weathering techniques at the Centre for Sustainable Mining at the University of Queensland.

## **12 COMPLAINTS HOTLINE**

Endeavor Mine has established a complaints hotline for members of the Public to voice any concerns they have with Endeavor Mine activities. The phone number to call is (02) 68306475 or email on [enquiries@endeavor.com.au](mailto:enquiries@endeavor.com.au). The number can be called 24 hours a day / 7 days a week. Endeavor will investigate any complaint and take immediate action if the complaint is validated.