

#### **ENDEAVOR OPERATIONS PTY LTD**

# **ENDEAVOR MINE**

# MONTHLY ENVIRONMENTAL REPORT

# October 2021

Name of Operation	Endeavor Mine
Name of Licensee	Endeavor Operations Pty Ltd
<b>Environmental Protection Licence</b>	No: 1301
Reporting Period Start Date	1 October 2021
Reporting End Date	31 October 2021

# **TABLE OF CONTENTS**

1	INTRO	DUCTION	3
2	MONIT	ORING RESULTS	3
	2.1 Di	ust Monitoring	3
	2.1.1	Dust Monitoring Methodology and Limits	4
	2.1.2	Monitoring Locations	4
	2.1.3	Dust Monitoring Data	5
	2.2 G1	oundwater Monitoring	
	2.2.1	Monitoring Locations	
	2.2.2	Monitoring Results Data	
		ailings Deposition	
	2.3.1	Tailings Deposition: Data and Discussion	
3		TS LOG	
4	COMPI	LAINTS HOTLINE	10
		FIGURES LIST	
Fi	gure 2.1	Dust monitoring gauge located in the project	3
Fi	gure 2.2	Endeavor Mine Dust Monitoring Locations	5
Fi	gure 2.3	Location of the Piezometer Monitoring Locations	8
		TABLES LIST	
Ta	able 2-1	Endeavor Mine Air Monitoring Requirements	4
Ta	able 2-2	Dust monitoring results October 2021	5
Ta	able 2-3	EPA Monitoring Stations	6
Та	able 2-4	EPA Monitoring Parameters	7
Ta	able 2-5	Groundwater monitoring results October 2021	9
Ta	able 2-6	Tailings Deposition for October 2021	10
Та	able 3-1	Laboratory results log	10

#### 1 INTRODUCTION

We at Endeavor Mine conduct systematic and periodic environmental monitoring of our operations to substantiate the effectiveness of our environmental controls which are in place to protect the environment, the health of our workers, our neighbours and the greater community. The results in this report correspond to the <u>October 2021</u>. This report publishes the summary of the environmental monitoring carried during this month for dust deposition, tailings deposition and groundwater. All monitoring is conducted in accordance with regulatory requirements and the EOPL Annual Environmental Monitoring Plan. Samples are collected and handled in accordance and compliance with regulatory requirements and taken to laboratories accredited by the National Association of Testing Authorities (NATA) for analysis.

#### 2 MONITORING RESULTS

## 2.1 Dust Monitoring

Air quality aspects and impacts associated with site operations are managed in accordance with the Air Quality Management Plan (END-PLN-ENV-006) and the requirement detailed in NSW Environmental Protection Licence 1301.

The Endeavor Mine is located 47 km from the nearest town (Cobar) and 4.5 km away for its nearest sensitive receptor (residential property). Therefore, dust deposition at these potential receptors is considered a low environmental risk.

Nevertheless, dust deposition on and beyond the boundary of the lease has the potential to cause environmental harm. Therefore Endeavor Mine manages airborne contaminants on site through the use of water sprays and a water trucks with depositional dust monitoring stations strategically located along the boundary of ML158/159/160/161 to measure performance.



Figure 2.1 Dust monitoring gauge located in the project

#### 2.1.1 Dust Monitoring Methodology and Limits

The Endeavor Mine Dust Monitoring Program measures dust deposition rates on a monthly basis at the main mining lease boundary (4 locations) and at a background location located 11km from the operating mine site (DDG 5 – Point ID 5). EP Licence 1301 does not set limits for dust deposition. However, these results are compared to the recommended limits outlined in *Approved Methods for the Modelling and Assessment of Air Pollutants in NSW 2016.* This guidance document recommends that the deposition rate for total insoluble matter when expressed as a 12 month rolling average should not exceed 4 g/m²/month and that site activities should not generate dust emissions which result in a dust deposition rate greater than 2 g/m²/month above background levels on a annual average. Table 2-1 describes the Pollutant, Units of Measure, Monitoring Frequency and Method of Sampling.

#### 2.1.2 Monitoring Locations

Point ID	Pollutant	Unit of measure	Frequency	Sampling Method
1	Particulates - Deposited	grams per square metre	Monthly	AM-19
(DDG1)	matter	per month		
2	Particulates - Deposited	grams per square metre	Monthly	AM-19
(DDG2)	matter	per month		
3 Particulates - Deposited		grams per square metre	Monthly	AM-19
(DDG3)	matter	per month		
4	Particulates - Deposited	grams per square metre	Monthly	AM-19
(DDG4)	matter	per month		
5 Particulates - Deposite		grams per square metre	Monthly	AM-19
(DDG5) matter		per month		

**Table 2-1** Endeavor Mine Air Monitoring Requirements

As shown in the satellite image (Figure 2.2), there are 5 dust monitoring locations on the boundary of the lease, with one located 11kms from the site at the turnoff to the Mine site near the Louth Road. This station was positioned to establish background levels.



Figure 2.2 Endeavor Mine Dust Monitoring Locations

# 2.1.3 Dust Monitoring Data

This report shows the results from the dust monitoring activities carried out during the month of October 2021 (Table 2-2). All values remain well under the recommended guidance values.

**Table 2-2 Dust monitoring results October 2021.** 

Monitoring locations (Monitoring from 05/10/2021 to 10/11/2021						
Parameters Unit		DDG1	DDG2	DDG3	DDG4	DDG5
Total soluble matter	g/m2*month	1.0	0.8	1.0	2.2	1.7
Total insoluble matter	g/m2*month	2.1	1.6	1.6	2.8	1.2

## 2.2 Groundwater Monitoring

Deep regional groundwater flows to the south west, conforming to the structural dip of the underlying sedimentary rocks. Groundwater inflow into the mine is observed at a depth range of between 60 to 80 m below ground surface. A shallow, perched aquifer occurs is found in the vicinity of the Central Tailings Discharge CTD between approximately 0.5 to 13 m below ground surface. This aquifer is recharged by rainfall and seepage water from the operational TSF via a permeable gravelly soil layer in the area.

A review of groundwater characteristics undertaken by consultants Environmental Earth Sciences (EES) in 2013 indicates there is no interface between the shallow perched water and the deep regional aquifer.

Groundwater quality at the mine is generally poor due to the high salinity. The water has been sampled by NSW Water Conservation and Irrigation for the original Environmental Impact Statement (EIS) could be considered "brackish" and was found to have an electrical conductivity (EC) of 26,000  $\mu$ S/cm (sea water is approximately 30,000 us/cm). Further, it was noted that the water was not suitable for stock, domestic or farm use. Potential contamination of the groundwater would be of low risk due to the naturally poor quality of the water.

#### 2.2.1 Monitoring Locations

Endeavor Mine's groundwater monitoring locations are concentrated around the perimeter of the Central Tailings Discharge (CTD) and the Sector 5 Tailings Storage Facility (CTF), while surface water monitoring locations are focused on water storages that could potentially discharge to environment during a major rain or storm event. Table 2-3 describes the monitoring stations, where Figure 2.3 shows the locations of the piezometers. Depending on availability of water or flow, unfortunately on some occasions, piezometers cannot be monitored as a result of being dry. Parameters to be monitored are described in

Table 2-4.

**EPA ID** Type of monitoring point **Location description** 9 PZ Labeled as BH02 Groundwater monitoring point **10** Groundwater monitoring point PZ Labeled as BH02B 11 Groundwater monitoring point PZ Labeled as BH03 **12** Groundwater monitoring point PZ Labeled as BH06 **13** PZ Labeled as BH08A Groundwater monitoring point 14 Groundwater monitoring point PZ Labeled as BH09 PZ Labeled as BH10 **15** Groundwater monitoring point Groundwater monitoring point PZ Labeled as BH10B 16 **17** Groundwater monitoring point PZ Labeled as BH12B 18 Groundwater monitoring point PZ Labeled as BH14

Groundwater monitoring point

Groundwater monitoring point

Groundwater monitoring point

**Table 2-3** EPA Monitoring Stations

19

20

25

PZ Labeled as BH15

PZ Labeled as BH16

PZ Labeled as BH13

**Table 2-4** EPA Monitoring Parameters

Pollutant Unit of measure		Frequency	Sampling method
Arsenic	milligrams per litre	Quarterly	Representative sample
Cadmium	milligrams per litre	Quarterly	Representative sample
Calcium	milligrams per litre	Quarterly	Representative sample
Chloride	milligrams per litre	Quarterly	Representative sample
Copper	milligrams per litre	Quarterly	Representative sample
Cyanide (total)	milligrams per litre	Quarterly	Representative sample
<b>Electrical conductivity</b>	milligrams per litre	Quarterly	Representative sample
Iron	milligrams per litre	Quarterly	Representative sample
Lead	milligrams per litre	Quarterly	Representative sample
Magnesium	milligrams per litre	Quarterly	Representative sample
Manganese	milligrams per litre	Quarterly	Representative sample
Mercury	milligrams per litre	Quarterly	Representative sample
pН	рН	Quarterly	Representative sample
Potassium	milligrams per litre	Quarterly	Representative sample
Sodium	milligrams per litre	Quarterly	Representative sample
Standing water level	metres	Quarterly	Representative sample
Sulfate	milligrams per litre	Quarterly	Representative sample
Total dissolved solids	milligrams per litre	Quarterly	Representative sample
Zinc	milligrams per litre	Quarterly	Representative sample

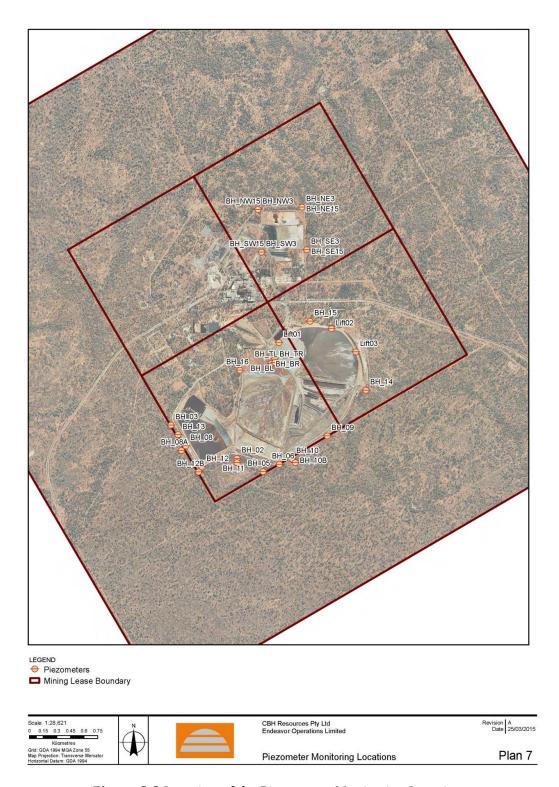


Figure 2.3 Location of the Piezometer Monitoring Locations

# 2.2.2 Monitoring Results Data

Groundwater monitoring was carried out during the  $18^{th}$  and  $19^{th}$  of October 2021, the results are in Table 2-5.

**Table 2-5** Groundwater monitoring results October 2021

	Monitoring Locations (EPA ID)		BH 02B	BH 03	BH 06	BH 8A	ВН 9	BH 10	BH 10B	BH 12B	BH 14	BH 15	BH 16	BH 13
(EPA II			10	11	12	13	14	15	16	17	18	19	20	25
Standing Wa	iter (m)	3.11	3.99	3.46	3.54	4.28	4.5	11.99	6.3	6.07	7.12	12.8	3.58	2.95
pH Value Lab	pH Unit	7.01	7.15	7.44	6.53	7.23	7.3		7.52	7.2	7.44		6.68	7.18
EC Lab	μS/cm	12200	19800	26100	14100	21200	19700		19500	22700	16500		27500	28400
Temp Field	С	24.6	22.8	24.5	23.4	23.4	23.3		25.9	25.5	26.8		21.8	24.1
Total Dissolved Solids @180	mg/L	15300	16800	30200	13400	24000	19500		20300	21100	15400		22000	24200
Sulfate SO4 -	mg/L	6450	6060	6300	6120	6590	9990		10600	6210	6850		4420	6580
Chloride	mg/L	2630	4280	8670	2190	7740	2870		2710	7010	3060		8200	7720
Calcium	mg/L	660	530	466	566	753	580		534	759	539		964	833
Magnesium	mg/L	1180	1210	1240	935	1380	1480		1970	1180	1170		976	1720
Sodium	mg/L	1550	2380	4970	1520	3860	2700	*	2210	3660	1960	*	3360	3920
Potassium	mg/L	99	103	215	78	174	242	*	183	212	145	*	113	165
Arsenic	mg/L	0.193	0.06	<0.010	2.16	0.003	0.007		0.005	0.006	0.008		0.002	0.005
Cadmium	mg/L	<0.0001	<0.0001	<0.0010	<0.0001	<0.0010	<0.0001		<0.0001	<0.0010	<0.0001		0.0004	<0.0010
Copper	mg/L	<0.001	0.001	<0.010	<0.001	0.002	<0.001		0.002	<0.010	<0.010		<0.001	<0.010
Lead	mg/L	<0.001	0.132	<0.010	0.006	<0.001	0.006		0.001	0.008	<0.001		<0.001	<0.010
Manganese	mg/L	10.4	4.58	4.62	3.43	11.5	4.67		4.59	3.52	0.01		32.9	19.3
Zinc	mg/L	0.022	0.035	<0.050	0.28	0.048	0.028		0.064	0.02	0.027		1.46	0.016
Iron	mg/L	3.64	<0.05	0.59	198	<0.05	<0.05		<0.05	0.06	<0.05		38.6	1.19
Mercury	mg/L	<0.0001	<0.0001	<0.0001	<0.0001	<0.0001	<0.0001		<0.0001	<0.0001	<0.0001		<0.0001	<0.0001
Total Cyanide	mg/L	<0.004	<0.004	<0.004	0.035	<0.004	<0.004		<0.004	<0.004	<0.004		<0.004	<0.004

<sup>\*</sup>Not enough water to sample

ENDEAVOR OPERATIONS PTYLTD 9 | P a g e

## 2.3 Tailings Deposition

Tailings (also known as tails or residue) are the material left over after the process of separating the valuable fraction from the uneconomic fraction (waste) of the ore. Tailings are distinct from overburden or waste rock or other material that overlies an ore or mineral body and is displaced during mining without being processed.

The volumes of tailings can be large and require an engineered storage and capacity to safely house them, Depending on the nature of the ore or the type of extraction process, tailings can have the potential to harm the environment unless they are deposited and managed correctly.

The reporting of monthly tailings deposition is a legislative requirement as part of EPL 1301.

#### 2.3.1 Tailings Deposition: Data and Discussion

From the 1st of January 2020 the Mine has entered into Care and Maintenance, no tailings have been produced as there are no ongoing operations.

**Table 2-6** Tailings Deposition for October 2021

		rotection Licence ng Point 7		rotection Licence ng Point 8	TOTAL
	Volume of tailings deposited (m³)	Mass of tailing solids deposited (DMT)	Volume of tailings deposited (KL)	Mass of tailing solids deposited (DMT)	Mass of tailing solids deposited (DMT) YTD
October 2021	-	-	-	-	-

#### 3 RESULTS LOG

Table 3-1 Laboratory results log

Samples	Results received from laboratory
Dust deposition	01 December 2021
Groundwater	28 October 2021
Date report posted on website	3 December 2021

#### 4 COMPLAINTS HOTLINE

Endeavor Mine has established a complaints hotline for members of the Public to voice any concerns they have with Endeavor Mine activities. The phone number to call is (02) 68306555 or email on enquiries@endeavor.com.au. Endeavor will investigate any complaint and take immediate action if the complaint is validated.